



WORLDWIDE ELECTRIC MOTOR DATA SHEET

FM2-18-56HZC




HORSEPOWER	2		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	115/230 V / 1		
FRAME	56HZC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ		
FULL LOAD SPEED	1725 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 115 / 230 (110 / 220)	19.6 / 9.8 A		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	79.0%	0.82
DUTY CYCLE	Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	
	6.10 lb.ft.	17.31 lb.ft.	
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6205		
ODE BEARING	6203		
BASE TYPE	Rigid Base		
REGREASING INT. - DE BEARING	---		
REGREASING INT. - ODE BEARING	---		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
CONNECTION DIAGRAM	115/230 V - 6 Lead		
APPROXIMATE WEIGHT	45 lbs.		
INVERTER RATING	---		
REPLACEMENT PARTS	Capacitor (Start) Capacitor (Run) Capacitor Cover (Start) Capacitor Cover (Run) Endbell (DE) Endbell (ODE) Fan Fan Cover Junction Box Overload (Manual) Switch (Centrifugal) Switch (Stationary)	NSC56-4 (800uf/165V) NRC56 (40uf/250V) NSCCOVER56 NRCCOVER56 NDEEBELL56-4 NODEEBELL56 NFAN56 NFCOVER56 NJBOX56 FM2MO NCSWITCH56-2 NSSWITCH56	



WORLDWIDE ELECTRIC MOTOR DRAWING

FM2-18-56HZC

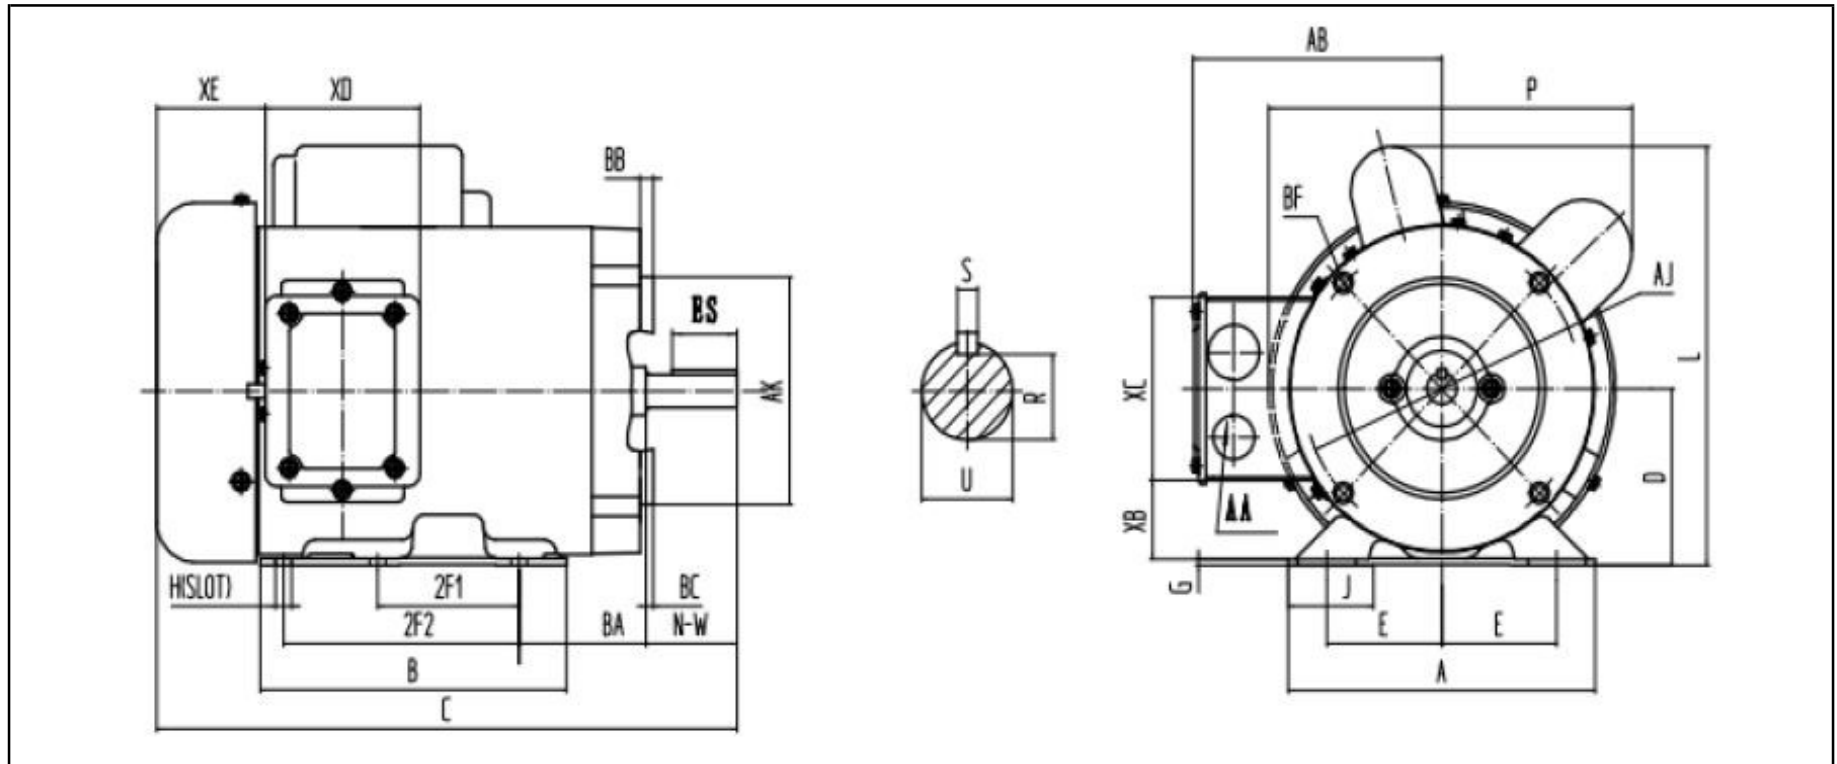

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	L	P	AB	BC
E	2F1	2F2	H	BA										
2.44	3	5	0.34	2.75	6.54	6.54	14.4	3.5	0.12	1.65	8.7	8.2	5.2	-0.19

KEY		KEYSET	FLANGE				SHAFT		TERMINAL BOX				
S	ES	R	AK	AJ	BF	BB	N-W	U	AA	XB	XC	XD	XE
0.188	1.41	0.771	4.5	5.875	3/8-16	0.16	2.25	0.875	2-0.88 / 2-1.109	1.65	3.7	3.2	2.15

REVISED - 08/20/20