



WORLDWIDE ELECTRIC MOTOR DATA SHEET

PEWWE200-36-445/7TS



HORSEPOWER	200		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	445/7TS		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP55		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3575 RPM		
SERVICE FACTOR	1.25		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	431 / 216 A (Usable On 208V At 477 A)		
LOCKED ROTOR AMPS (STARTING); 230 / 460	2900 / 1450 A		
NO LOAD CURRENT	70 / 35 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100 %	95.4%	0.91
	75 %	95.5%	0.91
	50 %	95.0%	0.88
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	294 lb.ft.	160%	230%
SLIP	0.69 %		
NEMA DESIGN	B		
MOMENT OF INERTIA	32.7 lb.ft.²		
MAX. TIME LOCKED ROTOR (Hot)	15 Seconds		
SOUND PRESSURE LEVEL	87 dB (A)		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft.		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6313 C3		
ODE BEARING	6313 C3		
REGREASING INT. - DE BEARING	1800 Hours		
REGREASING INT. - ODE BEARING	1800 Hours		
GREASE TYPE	SKF LGHP 2		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
INVERTER RATING	10:1 CT / 20:1 VT PWM Type		
CONNECTION DIAGRAM	230 / 460 V - 12 Lead Δ		
AREA CLASSIFICATION	Class I, Division 2, Groups A, B, C, D		
APPROXIMATE WEIGHT	1787 lbs.		



CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-445/7TS



DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	L	AB
E	2F1	2F2	H	BA									
9	16.5	20	0.81	7.5	22	24	43.8	11	1.38	3.4	23.5	23	20

KEY		KEYSET	SHAFT		TERMINAL BOX				
S	ES	R	N-W	U	AA	XB	XC	XD	XE
0.625	3.03	2.021	4.75	2.375	2 x 3	5.9	12	11.5	17.5

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:


PEWWE200-36-445/7TS

Document Generated: 25-Jun-2020
Document ID:


Customer:

Motor Type	PEWWE		FL Speed	3575	
Output Rating (HP)	200		LRT (%FLT)	160	460 volt FLA 216
Full Load Torque	294 lb.ft		BDT (%FLT)	230	230 volt FLA 431A
Rotor Wk ²	32.7 lb-ft ²				

SPEED VS TORQUE & CURRENT CURVE

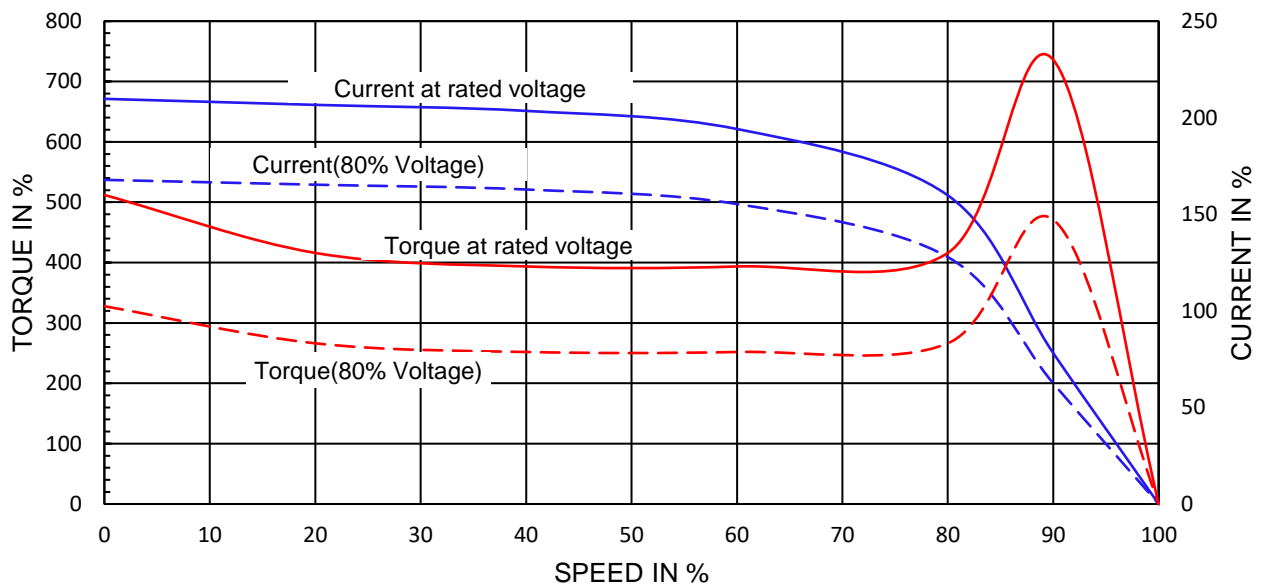

OUTPUT VS EFF., P.F. & CURRENT CURVE

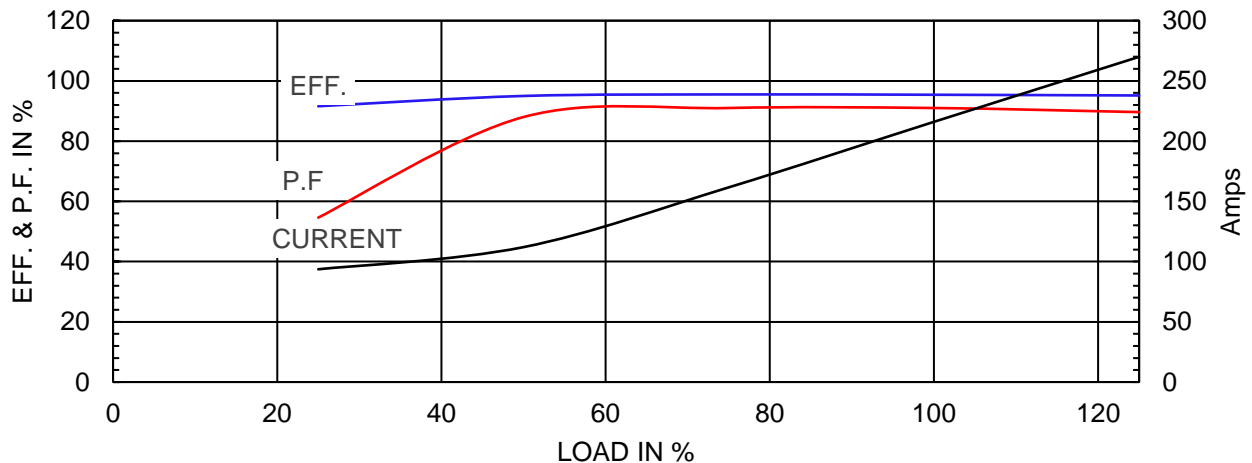

NAMEPLATE / WIRING

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE200-36-445/7TS

Document Generated: 21-Aug-2019
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		PREMIUM EFFICIENCY 3-PHASE INDUCTION MOTOR				259277 CC006A ISO9001	
Model	PEWWE200-36-445/7TS			Ser No.	ZP		
HP	200	S.F.	1.25	Type		Encl	TEFC IP55
Frame	445/7TS	P.F.	0.91	Ins Cl	F	Rating	40°C Amb Cont
Voltage	230/460	Hz	60Hz	Design	B	DE Brng	6313 C3
Amps	431A / 216A	RPM	3575	Code	G	ODE Brng	6313 C3
Nom.Eff.	FL 96.2 %	3/4 96.3 %	230/460V		Date		
Usable on 208V network at 477 Amps 1.0SF				Class I DIV. 2 Groups A B C D		Amb.40°C T3A(180°C)	
10:1 CT 20:1 VT PWM VFD 1.0SF				Class I Zone 2 IIC		Amb.55°C T3(200°C)	
50Hz 200 HP 200/400 V V 499 / 250 A 2975 rpm 1.0SF							
WorldWide Electric Corporation							

Low Voltage

6	4	5
7	8	9
12	10	11
1	2	3
L1	L2	L3

High Voltage

4	5	6
7	8	9
12	10	11
1	2	3
L1	L2	L3

