



WORLDWIDE ELECTRIC MOTOR DATA SHEET

PEWWE30-18-286TC-F2



HORSEPOWER	30		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	286TC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1775 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	69.4 / 34.7 A Usable On 208 V At 76.7 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	435 / 217.5 A		
NO LOAD CURRENT	29.0 / 14.5 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	93.6%	0.85
	75%	93.7%	0.82
	50%	93.3%	0.72
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	88.7 lb.ft.	160%	250%
SLIP	1.38%		
NEMA DESIGN	B		
MOMENT OF INERTIA	4.11 lb.ft. ²		
SOUND PRESSURE LEVEL	85 dB(A)		
MAX. TIME LOCKED ROTOR (Hot)	19 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6311		
ODE BEARING	6309		
REGREASING INT. - DE BEARING	7,500 Hours (0.64 oz.)		
REGREASING INT. - ODE BEARING	9,000 Hours (0.46 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F2		
ROTATION	Bi-Directional		
C-FLANGE	Attached		
D-FLANGE	PEW280TD		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 12 Lead Δ		
APPROXIMATE WEIGHT	450 lbs.		
INVERTER RATING	4:1 CT / 10:1 VT PWM Type		




CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-286TC-F2

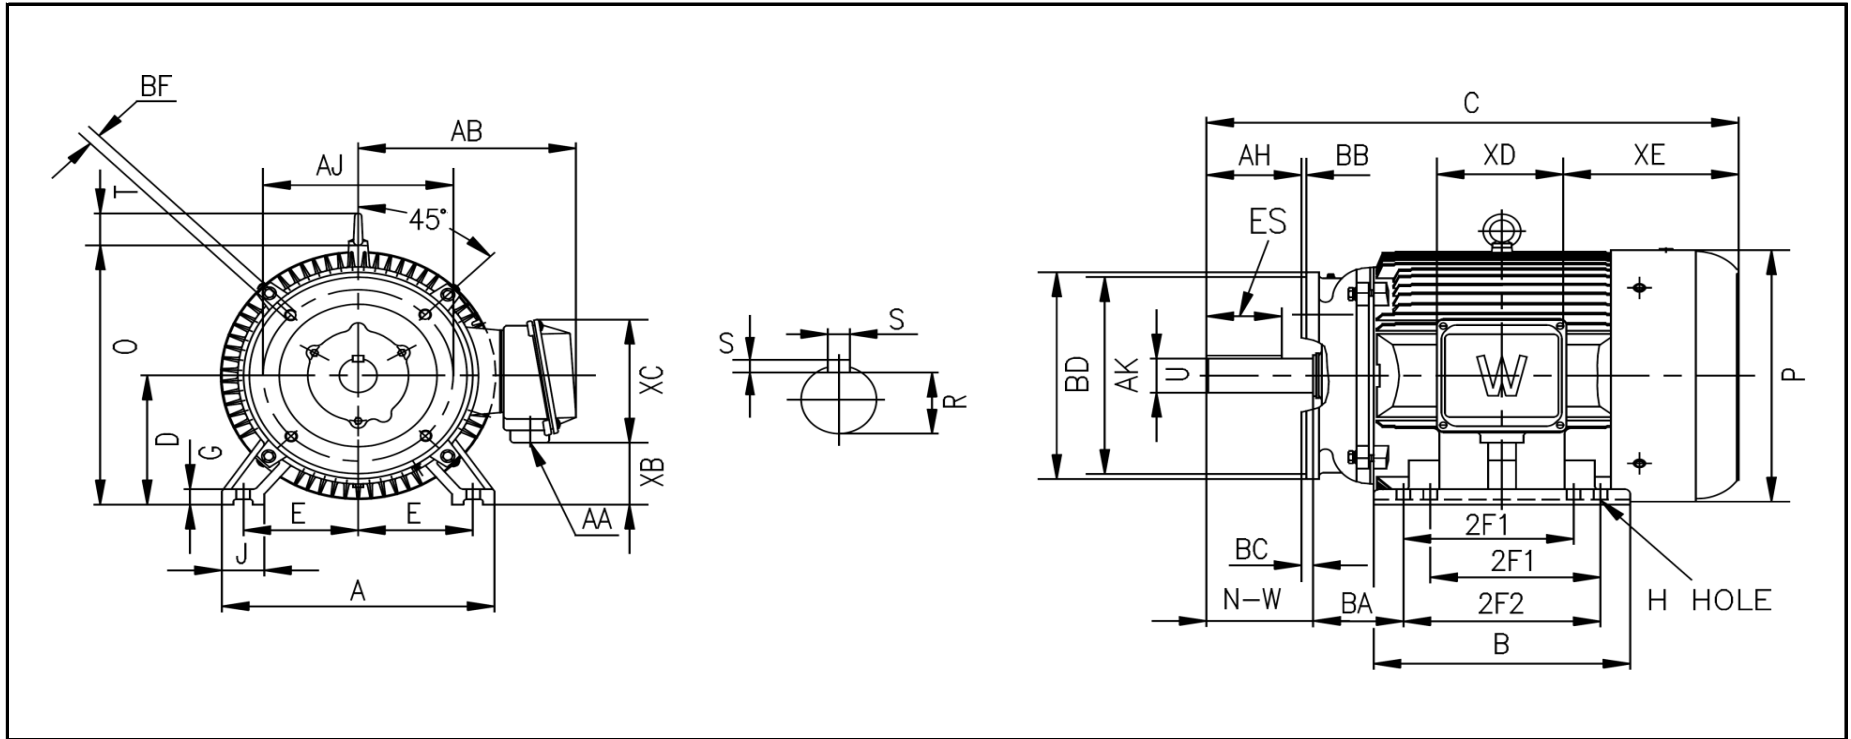

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
5.5	9.5	11	0.53	4.75	14	14	29.57	7	0.866	2.76	14.17	14.28	2.05	12

KEY		KEYSET		FLANGE				SHAFT		TERMINAL BOX				
S	ES	R	AK	AJ	BF	BB	BD	N-W	U	AA	XB	XC	XD	XE
0.5	3.28	1.591	10.5	9	1/2-13	0.25	11.25	4.62	1.875	1.5	3.58	7.2	6.3	11

REVISED - 08/14/13