

DATA SHEET

Premium Efficiency Motor: **SSPE3-12-213TC,**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 9-Nov-2020

Document ID:

Customer:

MOTOR INFORMATION

HP	3
RPM	1200
Phase	3
Frequency	60
Voltage	230/460
Frame Size	213TC
Enclosure	TEFC
Degree of Protection	IP66
Service Factor	1.15
Poles	6
Full Load Speed	1175
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	K
Duty Cycle	S1
Slip	2.08%
NEMA Design	B
Moment of Inertia	1.055 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	61 dB(A)
Number of Starts	12
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1, UL1004
Approvals	CSA,UL,CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	89.5 %	0.74
75%	87.0 %	0.62
50%	86.0 %	0.51

TORQUE

FULL LOAD	LRT	BDT
13.2 lb.ft.	250 %	280 %

AMPERAGE INFORMATION

	230V	460V
Full Load Amps	9.2A	4.6
Locked Rotor Amps	64A	32A
No Load Current	6A	3A
Usable at 208V	10 A	

BEARING INFORMATION

DE Bearing	6308 2RS
ODE Bearing	6208 2RS
Grease Type	Mobil Polyrex EM
DE Regreasing Interval	-- Hours
ODE Regreasing Interval	-- Hours
Grease Quantity	--

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	304 Stainless Steel
Connection Diagram	9 Lead 2Y/Y
Approximate Weight	170 lbs.

REVISED 10/21/2020


MOTOR DRAWING

Premium Efficiency Motor: **SSPE3-12-213TC**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

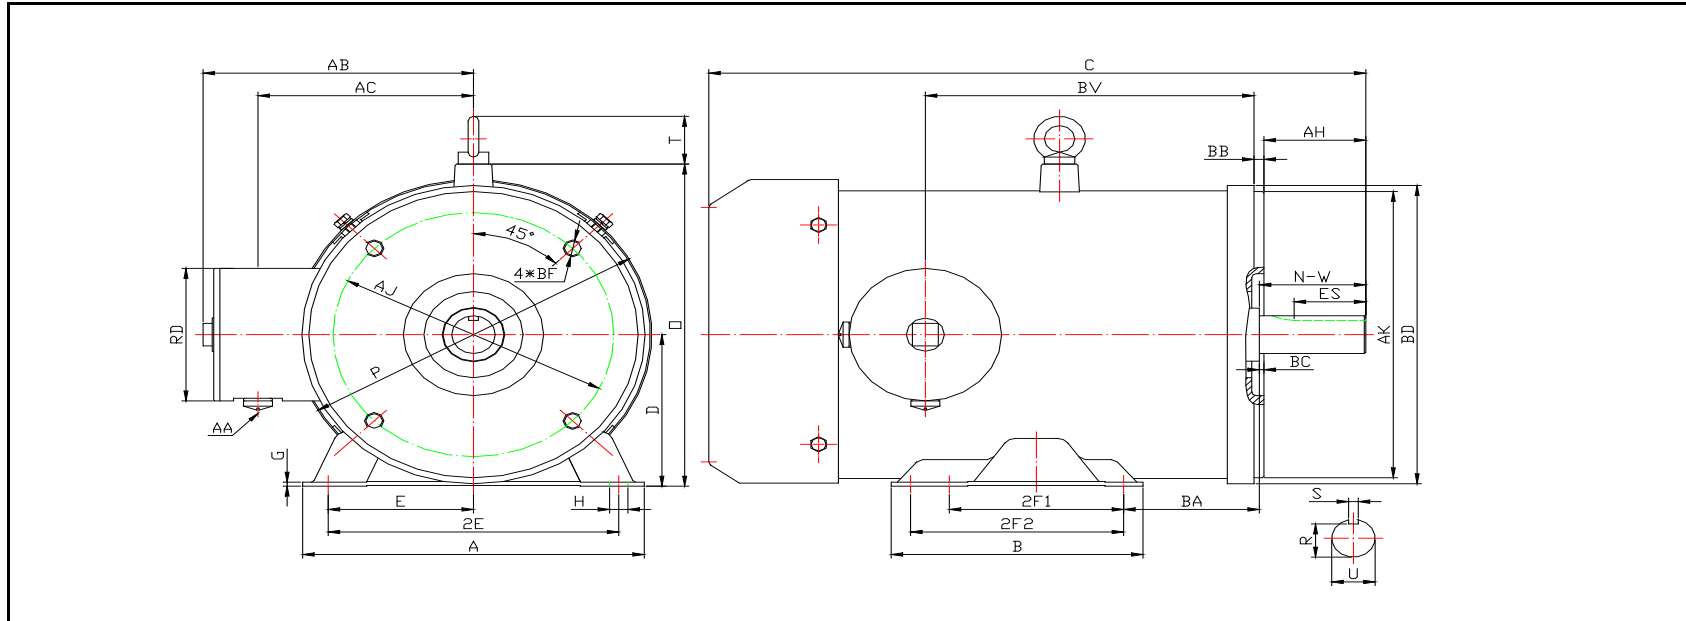

DIMENSION - INCHES

MOUNTING						A	B	C	D	G	P	O	T
E	2E	2F1	2F2	H	BA								
4.25	8.5	5.5	7	0.41	4.25	9.6	8.1	20.7	5.25	0.157	10.7	11.2	1.75

AB	BC	KEY		KEYSET	SHAFT			TERMINAL BOX				
		S	ES	R	AH	N-W	U	AA	AB	AC	RD	BV
7.85	0.25	0.312	2.41	1.201	3.12	3.38	1.375	1/2	7.85	6.41	3.95	11.15

FLANGE				
AJ	AK	BB	BD	BF
7.25	8.5	0.25	10.08	4*1/2-13

REV.	SUMMARY OF MODIFICATIONS	DATE
0		10/21/2020

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:


SSPE3-12-213TC

Document Generated: 9-Nov-2020
Document ID:

Customer:

Motor Type	SSPE		FL Speed	1175	
Output Rating (HP)	3		LRT (%FLT)	250	460 volt FLA 4.6
Full Load Torque	13.2	lb.ft	BDT (%FLT)	280	230 volt FLA 9.2A
Rotor Wk ²	1.055	lb-ft ²			

SPEED VS TORQUE & CURRENT CURVE

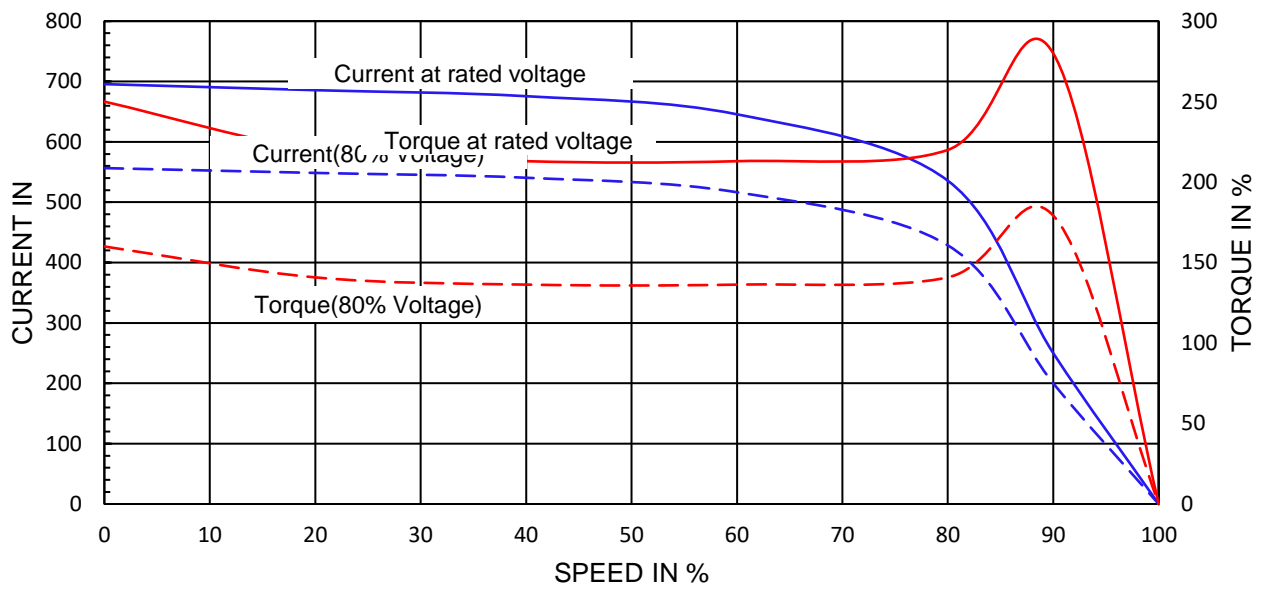

OUTPUT VS EFF., P.F. & CURRENT CURVE

