

# DATA SHEET

Premium Efficiency Motor: **SSPE5-12-215TCRD,**

**60 Hz**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 9-Nov-2020  
Document ID:

Customer:

MOTOR INFORMATION	
HP	5
RPM	1200
Phase	3
Frequency	60
Voltage	230/460
Frame Size	215TC
Enclosure	TEFC
Degree of Protection	IP66
Service Factor	1.15
Poles	6
Full Load Speed	1175
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	J
Duty Cycle	S1
Slip	2.08%
NEMA Design	B
Moment of Inertia	1.356 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	61 dB(A)
Number of Starts	12
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1, UL1004
Approvals	CSA,UL,CE

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	89.5 %	0.78
75%	87.5 %	0.67
50%	86.0 %	0.55

TORQUE		
FULL LOAD	LRT	BDT
22.1 lb.ft.	225 %	270 %

AMPERAGE INFORMATION		
	230V	460V
Full Load Amps	14A	7
Locked Rotor Amps	92A	46A
No Load Current	8A	4A
Usable at 208V	15 A	

BEARING INFORMATION	
DE Bearing	6308 2RS
ODE Bearing	6208 2RS
Grease Type	Mobil Polyrex EM
DE Regreasing Interval	-- Hours
ODE Regreasing Interval	-- Hours
Grease Quantity	--

ADDITIONAL DATA	
F2 Suitable	No
Shaft Material	304 Stainless Steel
Connection Diagram	9 Lead 2Y/Y
Approximate Weight	198.5 lbs.

REVISED 10/21/2020


# MOTOR DRAWING

Premium Efficiency Motor: **SSPE5-12-215TCRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

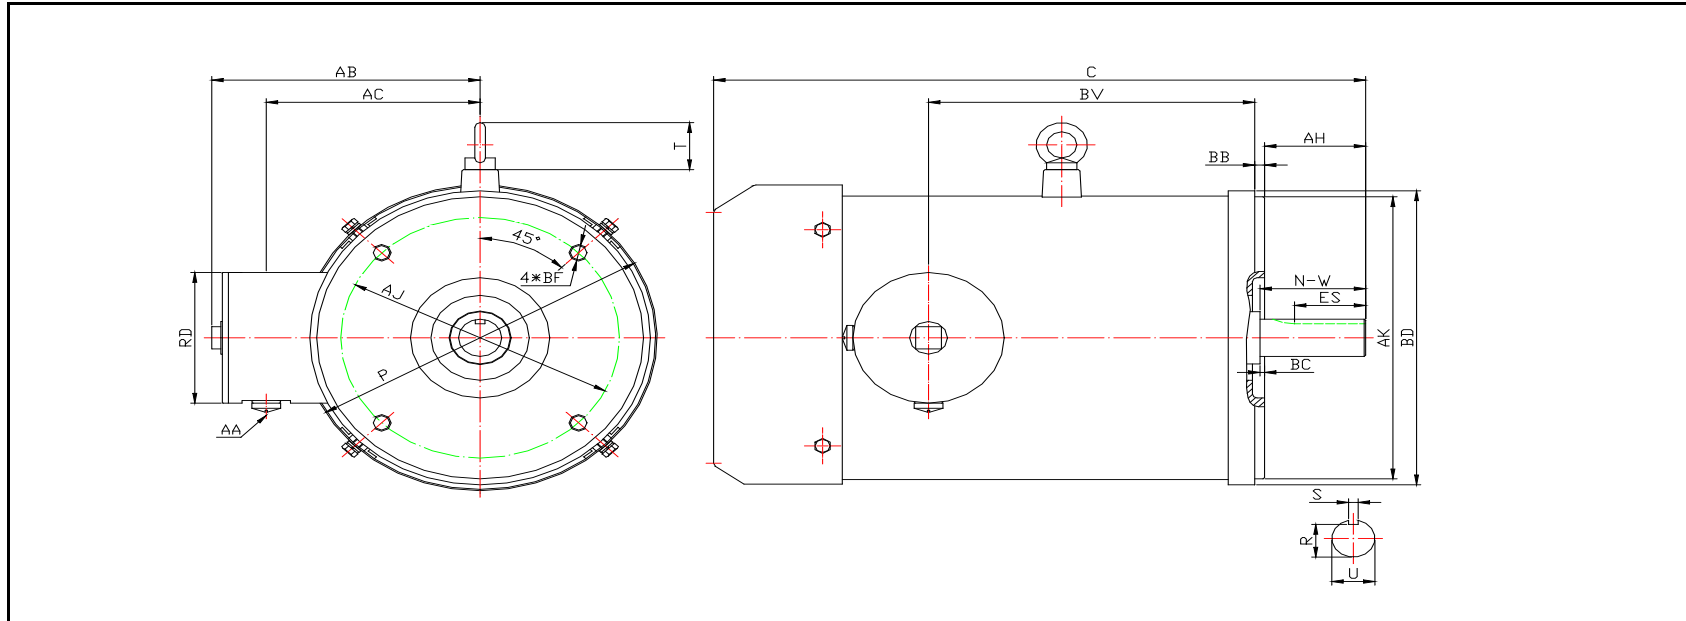

## DIMENSION - INCHES

MOUNTING						A	B	C	D	G	P	O	T
E	2E	2F1	2F2	H	BA								
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	21.5	N/A	N/A	10.7	N/A	1.75

AB	BC	KEY		KEYSET	SHAFT			TERMINAL BOX				
		S	ES	R	AH	N-W	U	AA	AB	AC	RD	BV
7.85	0.25	0.312	2.41	1.201	3.12	3.38	1.375	1/2	7.85	6.41	3.95	11.95

FLANGE				
AJ	AK	BB	BD	BF
7.25	8.5	0.25	10.08	4*1/2-13

REV.	SUMMARY OF MODIFICATIONS	DATE
0		10/21/2020

# PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

**SSPE5-12-215TCRD**

Document Generated: 9-Nov-2020  
Document ID:

Customer:

Motor Type	SSPE		FL Speed	1175	
Output Rating (HP)	5		LRT (%FLT)	225	
Full Load Torque	22.1	lb.ft	460 volt FLA	7	
Rotor Wk <sup>2</sup>	1.356	lb-ft <sup>2</sup>	230 volt FLA	14A	
			BDT (%FLT)	270	

